
| | |
|---|---|
| article# | **253831-sr** |
| article description | **3-way connector TopTaurus2 rubber cap with band nat LED IP54 red** |
| description long | 3-way connector TopTaurus2 rubber with cap<br>color housing/terminal-cover: black/red<br>contact carrier: polyamide<br>ready wired on 3-pole terminal block (PH1)<br>earthing system: Austrian/German (type F - with earth lug)<br>contacts: nickel plated<br>250V~ / 16A / 2P+E<br>external strain relief with gland nut, with LED voltage indicator light<br>for serve conditions<br>protection rating: IP54 |
| GTIN (EAN) | 9003399620096 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.383 kg |
| packaging quantitiy | 5 |
| minimum order quantitiy | 5 |




| | |
|---|---|
| ETIM 10.0 | EC001327 |
| Model | Coupler with protective contact CEE 7/3 (type F) |
| Material | Rubber |
| Material quality | Thermoplastic |
| Degree of protection (IP) | IP54 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| With voltage indication | True |
| Colour | Red |
| Number of poles | 3 |
| Nominal voltage | 250 V |
| Nominal current | 16 A |
| For heavy conditions according to VDE | True |



| | |
|---|---|
| K (cable Ø) | 6-19 mm |
| wire flexible | 1-2,5 mm² |
| contact screws | 50 Ncm |
| housing screws | 160 Ncm |
| strain relief | 400 Ncm |
| dismantling length | 30 mm |
| stripping length | 7 mm |
| ambient temperature | -25 – 40 °C |
| IK-code *) | IK10 |

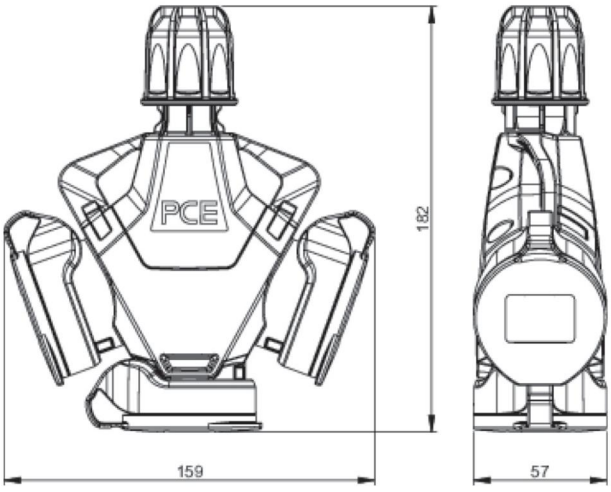


*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

https://www.pcelectric.at/shop/en/?func=detail&artnr=253831-sr

Changes and printing errors reserved!

8/13/2026