
| | |
|---|---|
| article# | **1357-2** |
| article description | **CEE-wall mounted socket 63A 5p 2h IP67 POWER TWIST** |
| description long | CEE-wall mounted socket 63A 5p 2h IP67 POWER TWIST<br>housing material: PC/ABS<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 2h<br>rated voltage/frequency: >50V~ / 300-500Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>cable entry: top, bottom, rear<br>inc. threaded blind cap<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399476808 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 1.463 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |





| | |
|---|---|
| ETIM 9.0 | EC001321 |
| Model | Surface mounted |
| IEC-amperage | 63 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 50-500 V (>300-500 Hz) green |
| Clock hour position | 2 h |
| Identification colour | Green |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Type of fastening | External mounting |
| Insulated mounting | True |
| Military model | False |

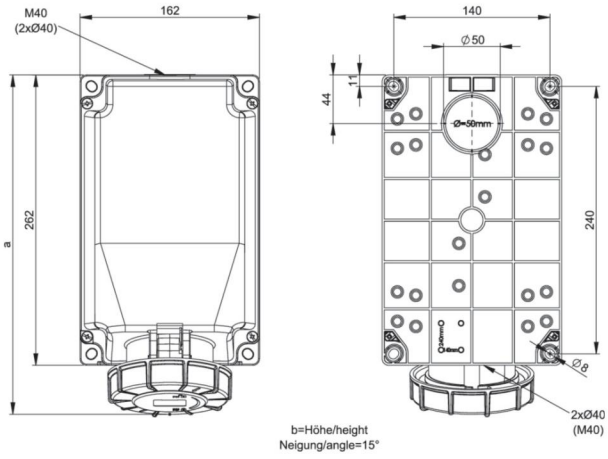


| | |
|---|---|
| a | 306 mm |
| b | 195 mm |
| wire flexible | 6-16 mm² |
| wire solid | 6-25 mm² |
| contact screws | 200 Ncm |
| housing screws | 200 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=1357-2

Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at