
| | |
|---|---|
| article# | **61252-9** |
| article description | **CEE-switched interlocked socket compact 32A 5p 9h IP66/IP67** |
| description long | CEE-switched interlocked socket compact 32A 5p 9h IP66/IP67<br>housing material: PA6 + PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>wall mounting, mechanical interlock<br>switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399175237 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.744 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |



| | |
|---|---|
| ETIM 9.0 | EC001324 |
| IEC-amperage | 32 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Switch | Mechanical locking |
| Material housing | Plastic |
| Model | Base unit and cover |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

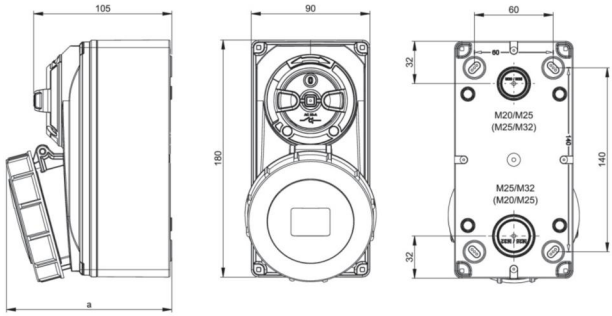


| | |
|---|---|
| a | 127 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-10 mm² |
| contact screws | 120 Ncm |
| housing screws | 110 Ncm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |
| IK-code *) | IK10 |

https://www.pcelectric.at/shop/en/?func=detail&artnr=61252-9

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

Changes and printing errors reserved!