
article#	**370R2111-ss**
article description	**PCE EV11.3 Wallbox R37 Z 11kW 7.5m Typ2**
description long	EV11.3 - Wandladestation für Elektrofahrzeuge R37-konform mit integriertem Energiezähler (MID) Kommunikation über Modbus TCP für Ladefreigabe, Lastmanagement und Phasenumschaltung. Zwei digitale Eingänge für Ladefreigabe und Ladestrombegrenzung. Anschluss: (230)400V AC, 50Hz, (1)3-phasig Anzahl der Ladepunkte: 1 fest angeschlossenes Ladekabel 7,5m mit Ladekupplung Typ 2 Max. Leistung pro Ladepunkt: 11kW (3,7kW 1-phasig) Ladestrom (max): 16A, Nennanschlussleistung: 11kW Absicherung: integr. DC-Fehlerstromerkennung (6mA RCM Modul) Werkstoff des Gehäuses/Abdeckung: Kunststoff (ABS), Farbe: schwarz HxBxT: 395x262x126 mm, Montageart: Wandmontage Standards: gem. EN 61851-1, IEC 61439-7 Umgebungstemperatur Betrieb: -25°C bis +40°C Schlagfestigkeit: IK08 , Schutzart: IP44
GTIN (EAN)	9003399679759
country of origin	PL
customs number	85371098
net weight	4.300 kg
packaging quantitiy	1
minimum order quantitiy	1

ETIM 9.0	EC002883
Installation side connection model	Other
Input voltage	230 – 400 V
Frequency	50 Hz
Nominal connection power	11 kW
Number of charging units	1
Max. power per charging point	11 kW
Width	262 mm
Height	395 mm
Depth	126 mm
Mounting method	Wall mounting
Number of vehicle connectors Type 2	1
Length of charging cable	7.5 m
Charging cable permanently lockable at charging device	False
DC residual current detection	True
Contactor welding detection	True
With circuit breaker	False
Network-enabled as a master	False
Network-enabled as an extender	False
Networkable via LAN	True
Networkable via Wi-Fi	False
LTE	False
With energy meter	True
With built-in RFID card reader	False
NFC (Near Field Communication)	False
Static load management integrated	False
Suitable for dynamic load management	True

Plug and charge (ISO 15118)	False
Material housing	Plastic
Degree of protection (IP rating)	IP44





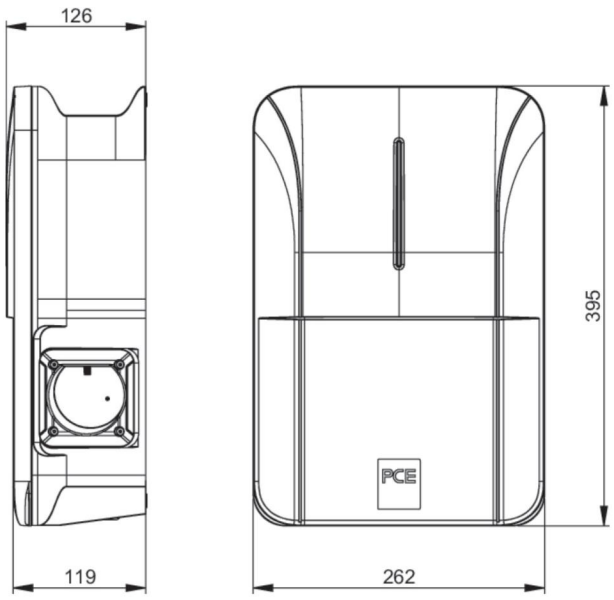

https://www.pcelectric.at/shop/en/?func=detail&artnr=370R2111-ss

10/17/2025 Changes and printing errors reserved!