
| | |
|---|---|
| article# | **3356-6xs** |
| article description | **CEE-flanged socket straight (100x100) 63A 5p 6h IP67 PCS POWER TWIST black** |
| description long | CEE-flanged socket straight (100x100) 63A 5p 6h IP67 PCS POWER TWIST black<br>housing material: PA6<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x100 mm / 80x80 mm<br>with pilot contact system PCS (auxiliary switch 2A)<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399372889 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.655 kg |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |

| | |
|---|---|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 63 A |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles | 5 |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Flange size vertical | 100 mm |
| Drill hole distance vertical | 80 mm |
| Flange size horizontal | 100 mm |
| Drill hole distance horizontal | 80 mm |

| | |
|---|---|
| a | 100 mm |
| b | 100 mm |
| c | 80 mm |
| d | 80 mm |
| e | 50 mm |
| f | 80 mm |
| g | 7 mm |
| h | 85 mm |
| i | 147 mm |
| j | 146 mm |
| wire flexible | 6-16 mm² |
| wire solid | 6-25 mm² |
| contact screws | 200 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |
| IK-code *) | IK10 |

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.



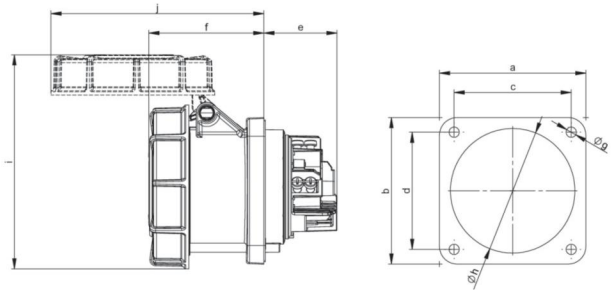


https://www.pcelectric.at/shop/en/?func=detail&artnr=3356-6xs

Changes and printing errors reserved!

9/27/2024