
article#	**967011355**
article description	**PRCD-S+ inline 16A 230V 30mA IP55**
description long	Mobile personal protection device PRCD-S+ 16A 250V~; I∆N = 30mA Protection degree IP55 Housing grey /black /red PE conductor circuit is switched on in advance and switched off with a delay. Terminal cross section: 1-2,5mm² according DIN VDE 0661 DGUV Information 203-006 (former BGI/GUV-I 608)
GTIN (EAN)	9003399306570
country of origin	SI
customs number	85362010
net weight	0.330 kg
packaging quantitiy	1
minimum order quantitiy	1



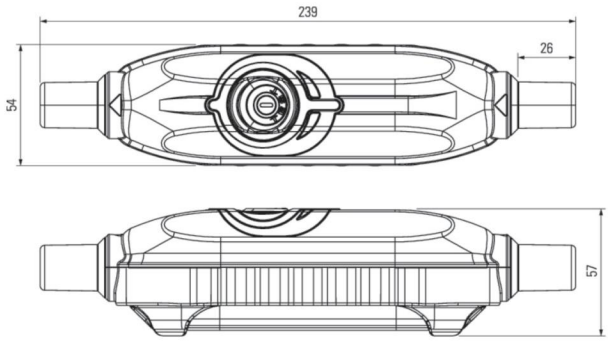

ETIM 10.0	EC000003
Number of poles	3
Rated voltage	230 V
Rated current	16 A
Rated fault current	0.03 A
Mounting method	Cable
Leakage current type	Other
Voltage type	AC
Frequency	50 Hz
Degree of protection (IP)	IP55
Connectable conductor cross section multi-wired	1 – 2.5
Colour	Grey
RAL-number (similar)	7046
Type of personal protection PRCD	PRCD-S+

IK-code *)	IK09

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

https://www.pcelectric.at/shop/en/?func=detail&artnr=967011355



Changes and printing errors reserved!

3/19/2026