
article#	**4259-6v**
article description	**CEE-receptacle flange 80x97 angled 30A 4P5W 6h IP44 UL**
description long	CEE-receptacle flange 80x97 angled 30A 4P5W 6h IP44 UL (PCE530RA6Sv) housing material: PA6 rated current: 32A/30A number of poles: 4P5W (5p) clock position: 6h rated voltage: 200/346 - 240/415VAC contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 80x97mm / 60x73mm IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399456206
country of origin	AT
customs number	85366990
net weight	0.214 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001317
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated
Flange size vertical	97 mm
Drill hole distance vertical	73 mm
Flange size horizontal	80 mm
Drill hole distance horizontal	60 mm

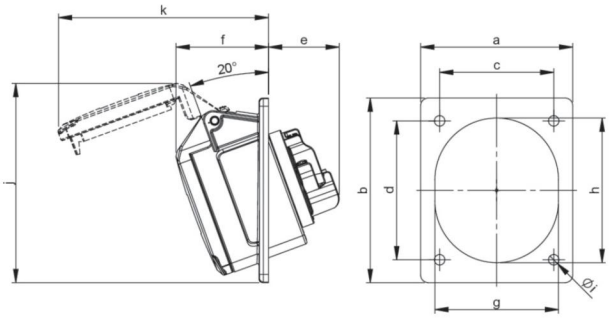

a	3.15 inch
b	3.82 inch
c	2.36 inch
d	2.87 inch
e	1.89 inch
f	2.17 inch
g	2.76 inch
h	3.31 inch
i	0.22 inch
j	3.90 inch
k	5.12 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm²
contact screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=4259-6v

Changes and printing errors reserved!

8/18/2025