

| | |
|---|---|
| article# | **777152-9** |
| article description | **CEE-flanged plug angled 16A 5p 9h IP67** |
| description long | CEE-flanged plug angled 16A 5p 9h IP67<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP67 |
| GTIN (EAN) | 9003399729423 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.219 kg |
| packaging quantitiy | 5 |
| minimum order quantitiy | 5 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 16 A |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Number of poles | 5 |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Built-up device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

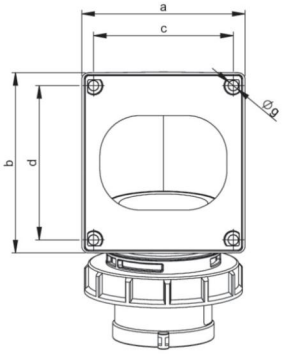


| | |
|---|---|
| a | 90 mm |
| b | 100 mm |
| c | 77 mm |
| d | 85 mm |
| e | 153 mm |
| f | 107 mm |
| g | 5 mm |
| wire flexible | 1-2,5 mm² |
| wire solid | 1-4 mm² |
| contact screws | 100 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |
| IK-code *) | IK09 |

https://www.pcelectric.at/shop/en/?func=detail&artnr=777152-9

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

Changes and printing errors reserved!

9/27/2024