

| | |
|---|---|
| article# | **20341-9uc** |
| article description | **Flanged socket oval fb with shutter and cover band IP66/68 (bronze-green)** |
| description long | Socket outlet with protective earth contact series NAUTILUS<br>housing material: PA6<br>color: bronze-green<br>flange size: 72x75 mm (oval) with 2-point fastening<br>connection technology: screw terminal, rear entry<br>system: French/Belgian (earth pin) with shutter<br>contacts: nickel plated<br>250V~ / 16A / 2P+E<br>protection rating: IP66/68 watertight (2bar/2h) |
| GTIN (EAN) | 9003399277184 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.086 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



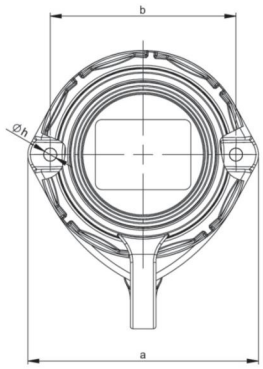


| | |
|---|---|
| ETIM 9.0 | EC001325 |
| Model | Earthing pin |
| Material | Plastic |
| Material quality | Thermoplastic |
| Flange size | Other |
| With hinged lid | True |
| For heavy conditions according to VDE | True |
| Degree of protection (IP) | IP68 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| Colour | Green |
| Number of poles | 3 |
| Nominal current | 16 A |
| Nominal voltage | 250 V |

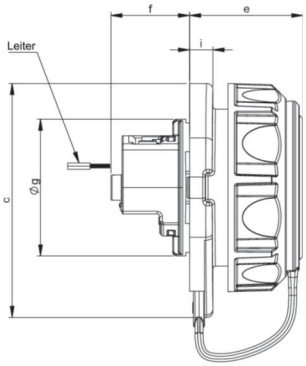


| | |
|---|---|
| a | 72 mm |
| b | 58 mm |
| c | 75 mm |
| e | 36 mm |
| f | 25 mm |
| g | 43 mm |
| h | 4 mm |
| i | 7 mm |
| wire flexible | 1,5-2x2,5 mm² |
| wire solid | 1,5-2x2,5 mm² |
| contact screws | 80 Ncm |
| stripping length | 7 mm |
| ambient temperature | -25 – 40 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=20341-9uc

Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at