
| | |
|---|---|
| article# | **3272-9v** |
| article description | **CEE-flanged socket (75x75mm) 32A 7p 9h IP66/IP67** |
| description long | CEE-flanged socket (75x75mm) 32A 7p 9h IP66/IP67<br>housing material: PA6<br>rated current: 32A<br>number of poles: 7 (6P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 220-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 75x75 mm / 60x60 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399439285 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.299 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Number of poles | 7 |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |
| Flange size vertical | 75 mm |
| Drill hole distance vertical | 60 mm |
| Flange size horizontal | 75 mm |
| Drill hole distance horizontal | 60 mm |

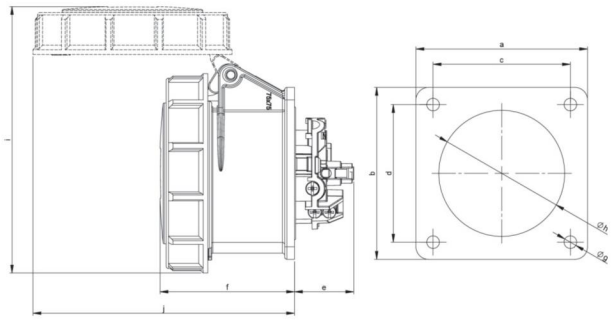

| | |
|---|---|
| a | 75 mm |
| b | 75 mm |
| c | 60 mm |
| d | 60 mm |
| e | 28 mm |
| f | 71 mm |
| g | 5,5 mm |
| h | 60 mm |
| i | 130 mm |
| j | 136 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-10 mm² |
| contact screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=3272-9v

Changes and printing errors reserved!

8/1/2023