
article#	**5249-12**
article description	**CEE-inlet wall mount 30A 3P4W 12h IP44 UL**
description long	CEE-inlet wall mount 30A 3P4W 12h IP44 UL (PCE430BS12S) housing material: PA6 rated current: 30A number of poles: 3P4W (4p) clock position: 12h rated voltage: 120/250VAC single phase contacts: brass connection technology: screw terminals IP protection class: IP44 according to UL1682 UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399568145
country of origin	AT
customs number	85366990
net weight	0.232 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001319
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	4
Clock hour position	12 h
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

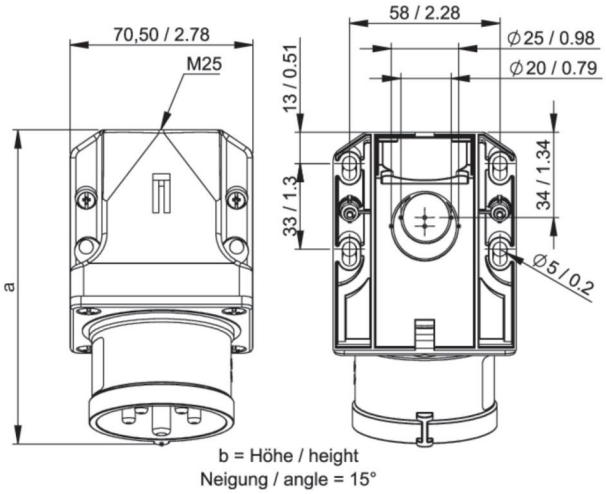

a	5.16 inch
b	3.23 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm²
contact screws	9.74 lbf-in
housing screws	9.74 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=5249-12

Changes and printing errors reserved!

2/23/2026