
article#	**1355-9**
article description	**CEE-wall mounted socket 63A 5p 9h IP67 pilot contact POWER TWIST**
description long	CEE-wall mounted socket 63A 5p 9h IP67 POWER TWIST housing material: PC/ABS rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 9h rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws cable entry: top, bottom, rear inc. threaded blind cap IP protection class: IP66/IP67 Extra: pilot contact with screw terminal (rated current 2A)
GTIN (EAN)	9003399631252
country of origin	AT
customs number	85366990
net weight	0.975 kg
packaging quantitiy	1
minimum order quantitiy	1





ETIM 9.0	EC001321
Model	Surface mounted
IEC-amperage	63 A
Number of poles	5
Voltage according to EN 60309-2	200-250 V (50+60 Hz) blue
Clock hour position	9 h
Identification colour	Blue
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Type of fastening	External mounting
Insulated mounting	True
Military model	False

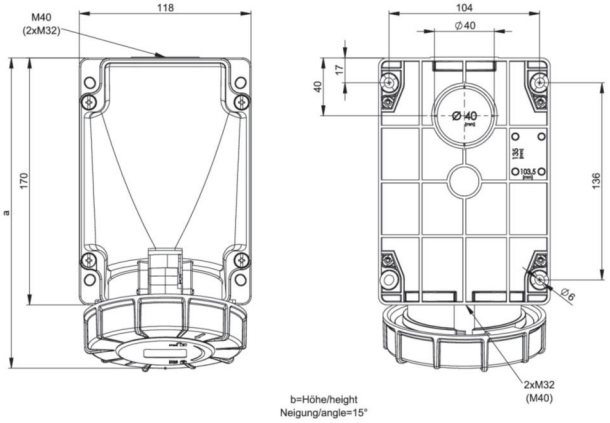

a	213 mm
b	173 mm
wire flexible	6-16 / 1-2,5 (pilot contact) mm²
wire solid	6-25 / 1-4 (pilot contact) mm²
contact screws	200 / 100 (pilot contact) Ncm
housing screws	200 Ncm
dismantling length	100 mm
stripping length	15-18 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=1355-9

Changes and printing errors reserved!

8/1/2023