

article#	**690000014**
article description	**Construction power distributor metal M-AVEV 35/11-3/V1/HS/A/OÖ**
description long	Versorgungsgebiet: OÖ Baustromverteiler 35A nach ÖVE EN 61439/4 RAL 2000 / 26kg / 380x770x300mm (BxHxT) ohne Untergestell incl. Überspannungsableiter 3+1 (TT+TN) Kl."C" (25A - 125A) Anschlusssicherung: D02 Sicherungslasttrennschalter 35A mit nicht auswechelbaren Passeinsätzen Anschlussquerschnitt: max. 16mm² Cu Zählerplatz: Wirkstromzählerschleife H07V-K 16mm2 400V AC 1xCEE-Steckdose 32A 5p 400V abgesichert ü. 1xLS 32A 3p C 1xCEE-Steckdose 16A 5p 400V abgesichert ü. 1xLS 16A 3p C 3xSK-Steckdose 16A 250V IP54 abgesichert ü. 3xLS 16A 1p C 1xFI 40A/4/0.03A therm. fest über alle Ausgänge 1xHauptschalter 3pol. über alle Ausgänge
GTIN (EAN)	9003399357909
country of origin	DE
customs number	85371098
net weight	26.000 kg
minimum order quantitiy	1





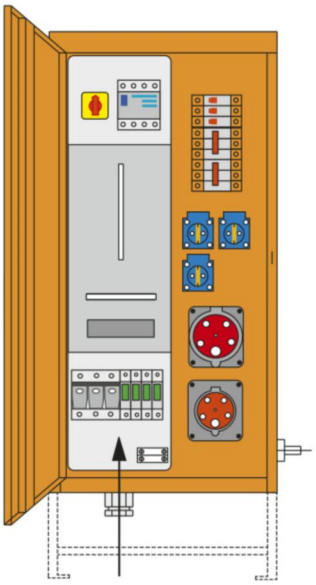



https://www.pcelectric.at/shop/en/?func=detail&artnr=690000014

ETIM 9.0	EC000484
Model	Connection-/distributor cabinet
Rated voltage	230/400 V
Rated current	35 A
Connected load	22 kVA
Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 5P (1, 2, 3, N, PE)	1
Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 5P (1, 2, 3, N, PE)	1
Number of socket outlets with protective contact CEE 7/3 (type F)	3
Number of meter panels	1
Main switch	Other
Main switch rated current	63 A
Number of poles main switch	3
Number of miniature circuit breakers	5
Leakage current type	A
Number of earth leakage switches 30 mA	1
Degree of protection (IP)	IP44
Material housing	Steel
Width	380 mm
Height	770 mm
Depth	300 mm

Changes and printing errors reserved!

8/1/2023