
| | |
|---|---|
| article# | **0253-4** |
| article description | **CEE-plug 32A 5p 4h IP44 GRIP** |
| description long | CEE-plug 32A 5p 4h IP54 GRIP<br>housing material: 2K (PA6/TPE)<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 4h<br>rated voltage/frequency: 57/100V~ - 75/130V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP44/IP54 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.271 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |




| | |
|---|---|
| ETIM 10.0 | EC000140 |
| IEC-amperage | 32 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP54 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Suitable for cable diameter | 11.5 – 22 mm |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

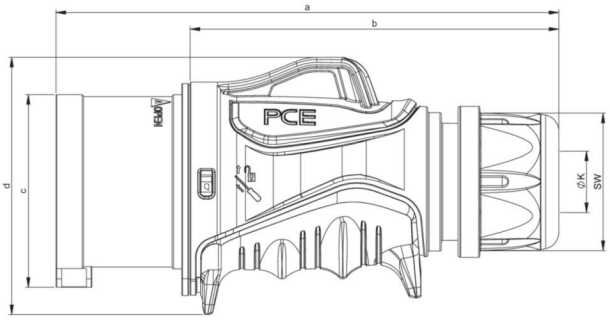


| | |
|---|---|
| a | 182 mm |
| b | 134 mm |
| c | 70 mm |
| d | 70 mm |
| K (cable Ø) | 11,5-22 mm |
| SW | 50 mm |
| wire flexible | 2,5-6 mm² |
| contact screws | 110 Ncm |
| strain relief | 600 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=0253-4

Changes and printing errors reserved!

3/18/2026