
| | |
|---|---|
| article# | **6249-9v** |
| article description | **CEE-inlet flange 70x70 straight 30A 3P4W 9h IP44 UL** |
| description long | CEE-inlet flange 70x70 straight 30A 3P4W 9h IP44 UL (PCE430B9Sv)<br>housing material: PA6<br>rated current: 32A/30A<br>number of poles: 3P4W (4p)<br>clock position: 9h<br>rated voltage: 250VAC<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 70x70mm / 56x56mm<br>IP protection class: IP44<br>according to UL1682 und IEC/EN 60309-2 (SERIE II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| GTIN (EAN) | 9003399489792 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.145 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 32 A |
| Amperage according to UL/CSA (for UL-version) | 30 A |
| Number of poles | 4 |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Construction type | Built-up device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

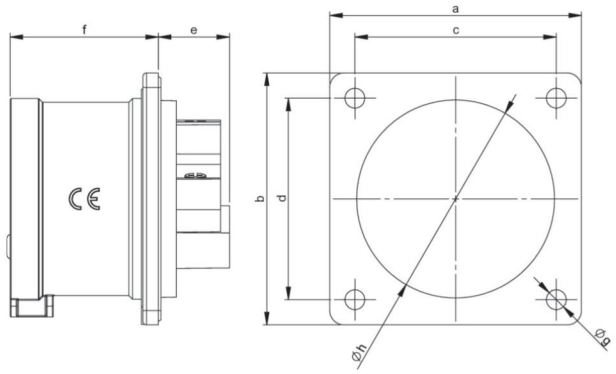


| | |
|---|---|
| a | 2.76 inch |
| b | 2.76 inch |
| c | 2.20 inch |
| d | 2.20 inch |
| e | 0.83 inch |
| f | 2.01 inch |
| g | 0.22 inch |
| h | 2.17 inch |
| wire flexible | 14-10 AWG |
| wire solid | 2,5-10 mm² |
| contact screws | 9.74 lbf-in |
| dismantling length | 1.97 inch |
| stripping length | 0.47-0.55 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=6249-9v

Changes and printing errors reserved!

2/23/2026