
article#	**9250027-p**
article description	**XREEL250 3xSSD54k 25m3G1.5H07 PS30 K2**
description long	Cable Reel XREEL250 Reel (black) with central, internal locking mechanism Protected connecting area Solid carrying rack (black) with ergonomic handle Central plate with 3 pcs safety machine sockets national version with self-closing hinged lids and sealing edge (105-0bsw) Rated operating voltage: 250V Rated current: 16A Protection rating: IP54 1 pcs thermal circuit breaker 25m Black cable H07RN-F 3G1.5mm2 electronic personal protection device PRCD-S+ 16A 250V~ 30mA integrated in cable TopTaurus2 safety plug 16A 2p+PE 2SL 250V IP54 (05721-sr) Cable reel installed ready for use complies with RoHS directive 2011/65/EU low voltage directive NSpRI 2014/35/EU UV stability according ISO 4892-2 acc standard IEC/EN 61242 Protection rating complete system: IP54 Conform with BGI608 K2 For outdoor usage
GTIN (EAN)	9003399341939
country of origin	PL
customs number	85444290
net weight	5.400 kg
packaging quantitiy	1
minimum order quantitiy	1





ETIM 10.0	EC000003
Number of poles	3
Rated voltage	230 V
Rated current	16 A
Rated fault current	0.03 A
Mounting method	Other
Leakage current type	Other
Voltage type	AC
Frequency	50 Hz
Degree of protection (IP)	IP54
Colour	Grey
RAL-number (similar)	7046
Type of personal protection PRCD	PRCD-S+

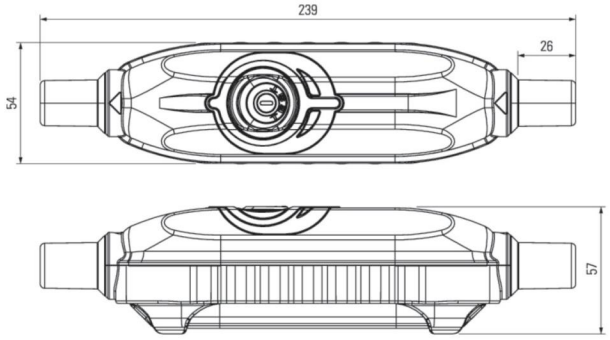

https://www.pcelectric.at/shop/en/?func=detail&artnr=9250027-p

Changes and printing errors reserved!

3/19/2026