
| | |
|---|---|
| article# | **864-4gv** |
| article description | **CEE-wall socket (surface outlet) Design 16A 4p 4h IP44 (grey)** |
| description long | CEE-wall socket (surface outlet) Design 16A 4p 4h IP44 (grey)<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>color: grey (similar to RAL 7035)<br>wall-/surface-mounting<br>hinged lid with inscription field (optional: key lock)<br>IP protection class: IP44 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 6 |
| minimum order quantitiy | 6 |



| | |
|---|---|
| ETIM 9.0 | EC001321 |
| Model | Surface mounted |
| IEC-amperage | 16 A |
| Number of poles | 4 |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |



| | |
|---|---|
| a | 90 mm |
| b | 90 mm |
| c | 73 mm |
| d | 73 mm |
| e | 47 mm |
| f | 48 mm |
| g | 25 mm |
| wire flexible | 1-2x2,5 mm² |
| wire solid | 1-2x4 mm² |
| contact screws | 100 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

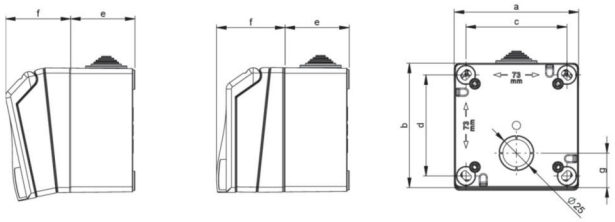

https://www.pcelectric.at/shop/en/?func=detail&artnr=864-4gv

Changes and printing errors reserved!