
article#	**090131140A**
article description	**Construction power distributor metal BV M-AVEV 80/321-6/WA/FU3/A/TIWAG/110105**
description long	Versorgungsgebiet: TIWAG Baustromverteiler 80A nach ÖVE EN 61439/4 RAL 2000 / 100kg / 1040x1270x360mm (BxHxT) m. Untergest. 300mm incl. Überspannungsableiter 3+1 (TT+TN) Kl."C" (25A - 125A) Anschlussklemmen 6-70 mm² Cu Zählerplatz: 1 Zählerfeld, 1 Wandlerfeld mit Schienensystem Cu 20 x 5mm und Zählerprüfklemmen mit Spannungspfadsicherung 10A Hauptsicherung: Tarifschalter einstellbar 63-80A über alle Ausgänge im Vorzählerbereich plombierbar 1 CEE-Steckdose 63A 5p 400V abgesichert mit Sicherung DIII 63A 2xCEE-Steckdose 32A 5p 400V abgesichert ü. 2xLS 32A 3p C 3xCEE-Steckdose 16A 5p 400V abgesichert ü. 3xLS 16A 3p C 6xSK-Steckdose 16A 250V IP54 abgesichert ü. 6xLS 16A 1p C 1xFI 63A/4/0,3A allstromsensitiver FI für CEE-Steckdose 63A 5p 400V 1xFI 63/4/0,03A, therm. fest für CEE-Steckdosen 32A+16A (FI vorges. m. DIII 63A) 1xFI 40/4/0,03A, therm. fest für Schuko-Steckdosen (FI vorges. m. DIII 35A)
GTIN (EAN)	9003399558511
country of origin	DE
customs number	85371098
net weight	100.000 kg
minimum order quantitiy	1

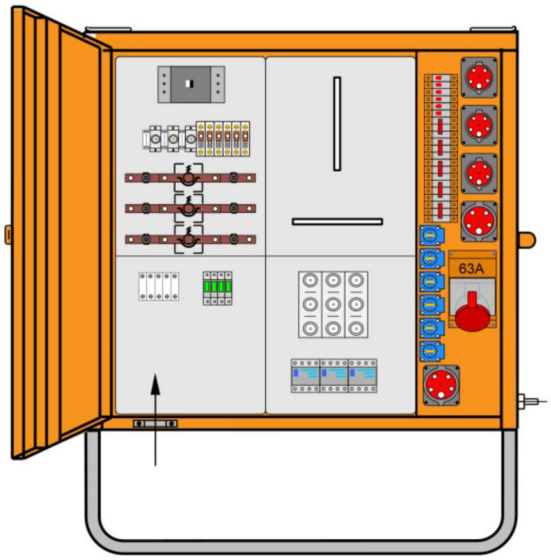

https://www.pcelectric.at/shop/en/?func=detail&artnr=090131140A

ETIM 9.0	EC000484
Model	Connection-/distributor cabinet
Rated voltage	230/400 V
Rated current	80 A
Connected load	55 kVA
Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 5P (1, 2, 3, N, PE)	3
Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 5P (1, 2, 3, N, PE)	2
Number of CEE socket outlets (IEC 60309) 63 A / 400 V / 5P (1, 2, 3, N, PE)	1
Number of socket outlets with protective contact CEE 7/3 (type F)	6
Number of meter panels	1
Main switch	None
Number of miniature circuit breakers	12
Leakage current type	Other
Number of earth leakage switches 30 mA	2
Number of earth leakage switches 300 mA	1
Degree of protection (IP)	IP44
Material housing	Steel
Width	1040 mm
Height	1270 mm
Depth	360 mm

Changes and printing errors reserved!

8/1/2023