

| | |
|---|---|
| article# | **777152-4ttv** |
| article description | **CEE-flanged plug angled 16A 5p 4h IP67 TT** |
| description long | CEE-flanged plug angled 16A 5p 4h IP67 TT<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 4h<br>rated voltage/frequency: 57/100V~ - 75/130V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP67 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 5 |
| minimum order quantitiy | 5 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 16 A |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Number of poles | 5 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screw less terminal |
| Construction type | Built-up device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

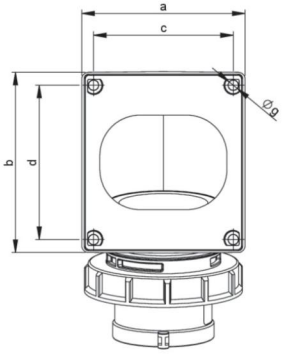


| | |
|---|---|
| a | 90 mm |
| b | 100 mm |
| c | 77 mm |
| d | 85 mm |
| e | 153 mm |
| f | 107 mm |
| g | 5 mm |
| wire flexible | 1-2,5 mm² |
| wire solid | 1-4 mm² |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=777152-4ttv

Changes and printing errors reserved!

8/1/2023