
article#	**3172-7f70v**
article description	**CEE-flanged socket (70x70mm) 16A 7p 7h IP66/IP67**
description long	CEE-flanged socket (70x70mm) 16A 7p 7h IP66/IP67 housing material: PA6 rated current: 16A number of poles: 7 (6P+PE) clock-position: 7h rated voltage/frequency: 480-500V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 70x70 mm / 56x56 mm IP protection class: IP66/IP67
GTIN (EAN)	9003399468834
country of origin	AT
customs number	85366990
net weight	0.207 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001317
IEC-amperage	16 A
Voltage according to EN 60309-2	500 V (50+60 Hz) black
Number of poles	7
Clock hour position	7 h
Identification colour	Black
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated
Flange size vertical	70 mm
Drill hole distance vertical	56 mm
Flange size horizontal	70 mm
Drill hole distance horizontal	56 mm

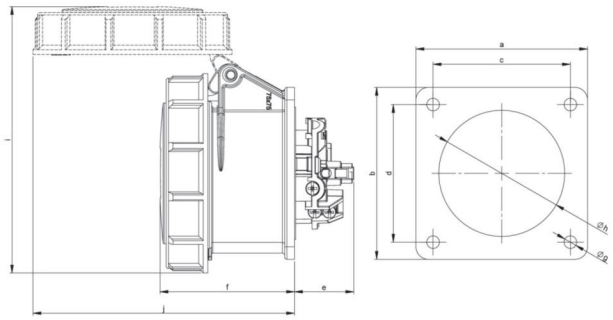

a	70 mm
b	70 mm
c	56 mm
d	56 mm
e	26 mm
f	59 mm
g	5,5 mm
h	55 mm
i	117 mm
j	115 mm
wire flexible	1-2,5 mm²
wire solid	1-4 mm²
contact screws	100 Ncm
dismantling length	50 mm
stripping length	10-12 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C
IK-code *)	IK10

https://www.pcelectric.at/shop/en/?func=detail&artnr=3172-7f70v

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

9/27/2024 Changes and printing errors reserved!