
article#	**33551-10**
article description	**CEE-flanged socket straight (100x100) 63A 5p 10h IP44 Pilot POWER TWIST**
description long	CEE-flanged socket straight (100x100) 63A 5p 10h IP44 Pilot POWER TWIST housing material: PA6 rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 10h rated voltage/frequency: >50V~ / 100-300Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 100x100 mm / 80x80 mm with pilot contact sleeve IP protection class: IP44
country of origin	AT
customs number	85366990
packaging quantitiy	2
minimum order quantitiy	2



ETIM 9.0	EC001317
IEC-amperage	63 A
Voltage according to EN 60309-2	50-500 V (100-300 Hz) green
Number of poles	5
Clock hour position	10 h
Identification colour	Green
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	100 mm
Drill hole distance vertical	80 mm
Flange size horizontal	100 mm
Drill hole distance horizontal	80 mm

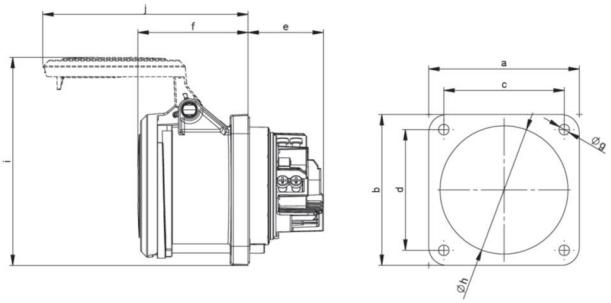

a	100 mm
b	100 mm
c	80 mm
d	80 mm
e	50 mm
f	75 mm
g	7 mm
h	85 mm
i	138 mm
j	138 mm
wire flexible	6-16 / 1-2,5 (Pilotkontakt) mm²
wire solid	6-25 / 1-4 (Pilotkontakt) mm²
contact screws	200 / 100 (Pilotkontakt) Ncm
dismantling length	100 mm
stripping length	15-18 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pceelectric.at/shop/en/?func=detail&artnr=33551-10

Changes and printing errors reserved!

(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at