
| | |
|---|---|
| article# | **752323-4** |
| article description | **CEE-wall mounted socket mit Fenster 32A 3p 4h IP67** |
| description long | CEE-wall mounted socket with window 32A 3p 4h IP67<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>cable entry: top, bottom, rear<br>inc. threaded blind cap<br>with hinged window (5 modules) and DIN rail<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399052149 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 1.007 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |



| | |
|---|---|
| ETIM 9.0 | EC000379 |
| CEE socket outlet 32 A | 1x32A xp xxxV |
| Other fixtures and/or empty locations | 5 |
| Material housing | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |
| Handling | Wall mounting |
| Degree of protection (IP) | IP67 |
| Colour | Grey |

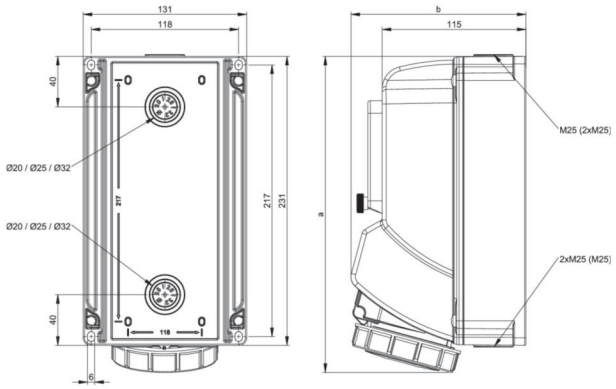


| | |
|---|---|
| a | 259 mm |
| b | 145 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-10 mm² |
| contact screws | 110 Ncm |
| housing screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=752323-4

Changes and printing errors reserved!

9/25/2023