
article#	**5259-6v**
article description	**CEE-inlet wall mount 30A 4P5W 6h IP44 UL**
description long	CEE-inlet wall mount 30A 4P5W 6h IP44 UL (PCE530BS6Sv) housing material: PA6 rated current: 32A/30A number of poles: 4P5W (5p) clock position: 6h rated voltage: 200/346 - 240/415VAC contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399684180
country of origin	AT
customs number	85366990
net weight	0.246 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001319
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

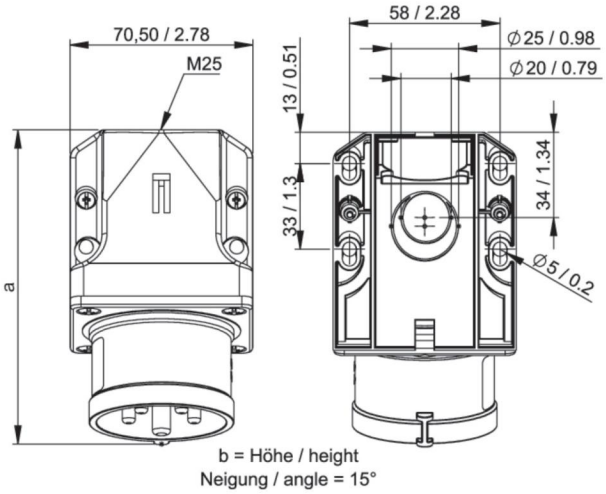

a	5.20 inch
b	3.35 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm²
contact screws	9.74 lbf-in
housing screws	9.74 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=5259-6v

Changes and printing errors reserved!

2/23/2026