
| | |
|---|---|
| article# | **3359-7** |
| article description | **CEE-receptacle flange 100x100 60A 4P5W 7h IP69k UL** |
| description long | CEE-receptacle flange 100x100 60A 4P5W 7h IP69k UL (PCE560R7W)<br>housing material: PA6<br>rated current: 60A<br>number of poles: 4P5W (5p)<br>clock position: 7h<br>rated voltage: 277/480VAC<br>contacts: brass with lamellar spring CuBe<br>connection technology: frame terminals with screws<br>IP rating: IP6X, X6, X7, X9k (watertight)<br>UL type: 4, 4X<br>HP-rating (locked rotor): 20<br>according to UL1682 and IEC/EN 60309-2 (SERIES II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.587 kg |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |



| | |
|---|---|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 60 A |
| Voltage according to EN 60309-2 | Other |
| Number of poles | 5 |
| Clock hour position | 7 h |
| Identification colour | Red |
| Degree of protection (IP) | IP69K |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Flange size vertical | 100 mm |
| Drill hole distance vertical | 80 mm |
| Flange size horizontal | 100 mm |
| Drill hole distance horizontal | 80 mm |

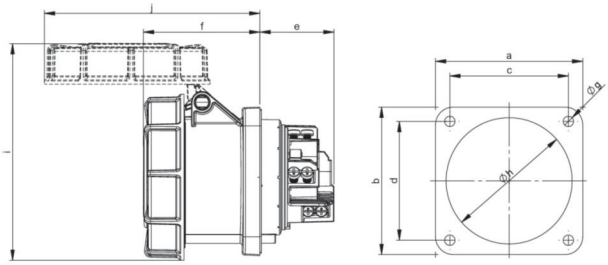


| | |
|---|---|
| a | 3.94 inch |
| b | 3.94 inch |
| c | 3.15 inch |
| d | 3.15 inch |
| e | 1.97 inch |
| f | 3.15 inch |
| g | 0.28 inch |
| h | 3.35 inch |
| i | 5.79 inch |
| j | 5.75 inch |
| wire flexible | 10-4 AWG |
| contact screws | 17.7 lbf-in |
| stripping length | 0.59-0.71 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=3359-7

Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at