
article#	**5149-12v**
article description	**CEE-inlet wall mount 20A 3P4W 12h IP44 UL**
description long	CEE-inlet wall mount 20A 3P4W 12h IP44 UL (PCE420BS12Sv) housing material: PA6 rated current: 20A number of poles: 3P4W (4p) clock position: 12h rated voltage: 120/250VAC single phase contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44 according to UL1682 UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399658259
country of origin	AT
customs number	85366990
net weight	0.183 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001319
Amperage according to UL/CSA (for UL-version)	20 A
Number of poles	4
Clock hour position	12 h
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

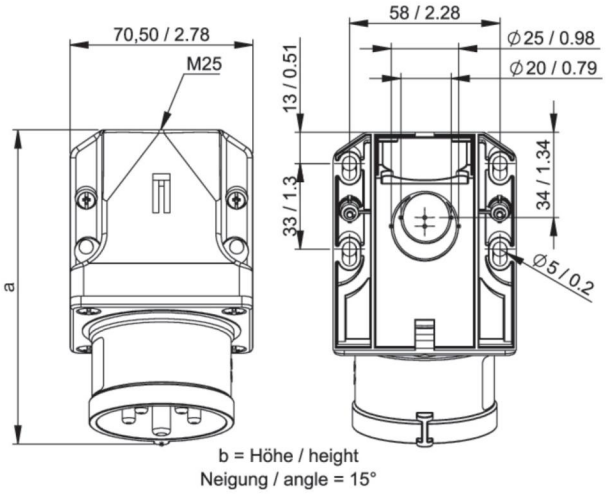

a	4.76 inch
b	2.99 inch
wire flexible	16-12 AWG
wire solid	1-4 mm²
contact screws	8.85 lbf-in
housing screws	9.74 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.39-0.47 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=5149-12v

Changes and printing errors reserved!

2/23/2026