
| | |
|---|---|
| article# | **7825-9** |
| article description | **CEE-switched interlocked socket DIN 32A 5p 9h IP44/IP54** |
| description long | CEE-switched interlocked socket DIN 32A 5p 9h IP44/IP54<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>wall mounting, mechanical interlock, incl. holder for Neozed fuses<br>switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA<br>cable entry: top, bottom or rear (incl. threaded blind cap)<br>IP protection class: IP44/IP54 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |



| | |
|---|---|
| ETIM 9.0 | EC001324 |
| IEC-amperage | 32 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP54 |
| Switch | Mechanical locking |
| Empty locations on mounting rail | False |
| Material housing | Plastic |
| Model | Base unit and cover |
| Protection | D0-system |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |




| | |
|---|---|
| a | 369 mm |
| b | 153 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-10 mm² |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

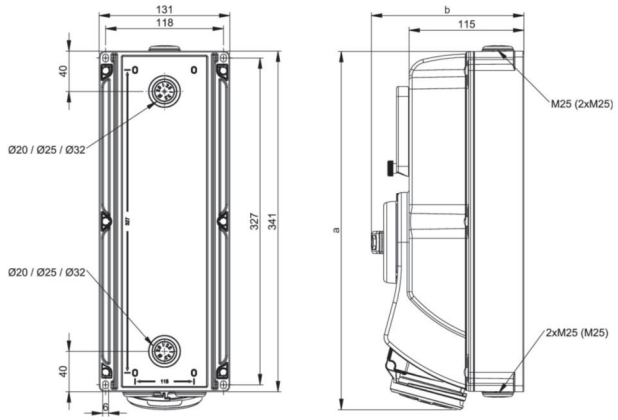


https://www.pcelectric.at/shop/en/?func=detail&artnr=7825-9

Changes and printing errors reserved!

2/26/2026