
| | |
|---|---|
| article# | **80172-9v** |
| article description | **CEE angled plug 16A 7p 9h IP66/IP67** |
| description long | CEE angled plug 16A 7p 9h IP66/IP67<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 7 (6P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 220-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399618642 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.220 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 10.0 | EC000140 |
| IEC-amperage | 16 A |
| Number of poles | 7 |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Suitable for cable diameter | 8 – 16 mm |
| Angle of plug | Angled Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

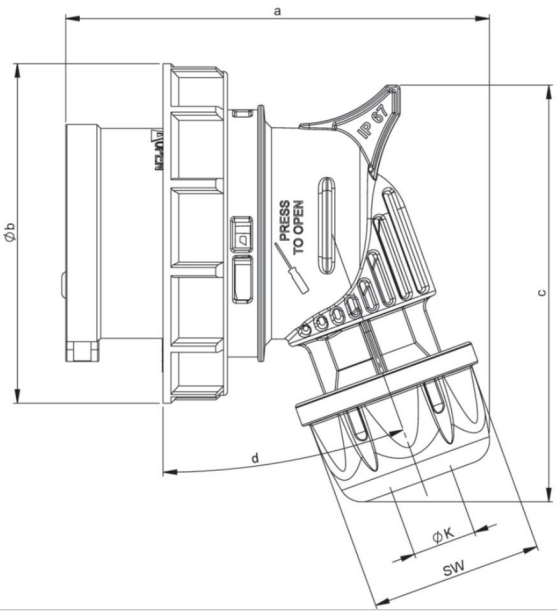


| | |
|---|---|
| a | 109 |
| b | 87 |
| c | 107 |
| d | 20 ° |
| K (cable Ø) | 8-16 mm |
| SW | 42 mm |
| wire flexible | 1-2,5 mm² |
| contact screws | 100 Ncm |
| strain relief | 500 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=80172-9v

Changes and printing errors reserved!

3/18/2026