
article#	**12392-4**
article description	**CEE-receptacle wall mount 30A 2P3W 4h IP67 UL**
description long	CEE-receptade wall mount 30A 2P3W 4h IP67 UL (PCE330RS4W) housing material: PA6 rated current: 32A/30A number of poles: 2P3W (3p) clock position: 4h rated voltage: 120VAC contacts: brass connection technology: screw terminals IP protection class: IP67 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399927010
country of origin	AT
customs number	85366990
net weight	0.298 kg
packaging quantitiy	5
minimum order quantitiy	5



ETIM 9.0	EC001321
Mounting method	Surface mounted
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Type of fastening	External mounting

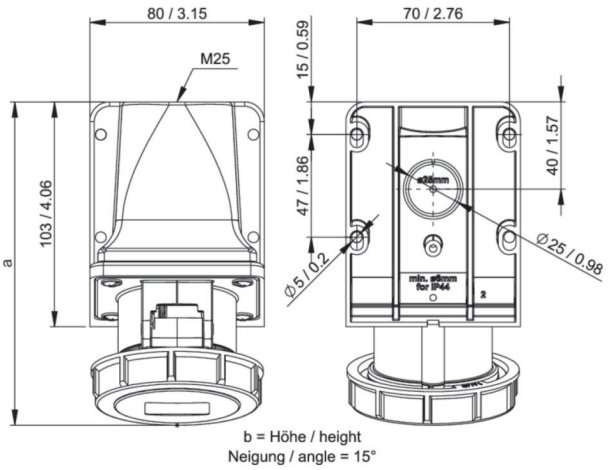

a	6.34 inch
b	4.25 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm²
contact screws	9.74 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=12392-4

Changes and printing errors reserved!

2/23/2026