
| | |
|---|---|
| article# | **2410-shuw** |
| article description | **Taurus2 rubber safety connector fb bulge IP20 (black/green)** |
| description long | Safety connector series Taurus2 - rubber<br>color (housing/ring): black/green, with sealing bulge<br>material (housing/contact carrier): TPE/PA6<br>earthing system: French/Belgian<br>16A/ 250V AC / 3p (2P+E), protection rating: IP20<br>Export version (usage in Austria and Germany not allowed!) |
| GTIN (EAN) | 9003399480652 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.076 kg |
| packaging quantitiy | 20 |
| minimum order quantitiy | 200 |



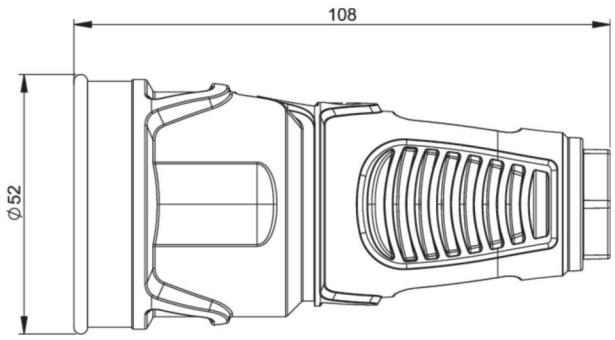


| | |
|---|---|
| ETIM 10.0 | EC001327 |
| Model | Earthing pin |
| Material | Rubber |
| Material quality | Thermoplastic |
| Degree of protection (IP) | IP20 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| Colour | Black |
| Number of poles | 3 |
| Nominal voltage | 250 V |
| Nominal current | 16 A |
| For heavy conditions according to VDE | True |

https://www.pcelectric.at/shop/en/?func=detail&artnr=2410-shuw

| | |
|---|---|
| K (cable Ø) | 6-13 mm |
| wire flexible | 1-2,5 mm² |
| contact screws | 80 Ncm |
| housing screws | 110 Ncm |
| strain relief | 110 Ncm |
| dismantling length | 30 mm |
| stripping length | 7 mm |
| ambient temperature | -25 – 40 °C |



Changes and printing errors reserved!

3/19/2026