
article#	**3803003006-w**
article description	**PCE PRI:CHARGER 22kW DOT2 LAN ERK ws**
description long	PCE PRI:CHARGER Charging Station for Electric Vehicles Connection: (230)400V AC, 50Hz, (1)3-phase Number of charging units: 1 Socket outlet Type 2 with locking actuator Max. power per charging point: 22kW Nominal connection power: 22kW WxHxD: 368x356x167 mm Mounting method: Wall mounting Protection: RCCB A + DC-fault protection (6mA) Access control: RFID Controller: ICC1324 Communication interface: LAN Module, WiFi Communication: OCPP 1.6 JSON, Modbus TCP ISO 15118 Powerline Communication (PLC) for plug & charge/ autocharge meter in compliance with calibration law Material housing: plastic/ black Front Design: PCE standard, white Degree of protection: IP54 Ambient temperature: -20°C bis +40°C Standards: IEC 61851-1, IEC 61851-22, IEC 62196
GTIN (EAN)	9003399719431
country of origin	AT
customs number	85371098
net weight	7.500 kg
packaging quantitiy	1
minimum order quantitiy	1

ETIM 10.0	EC002883
Installation side connection model	3-phase
Input voltage	230 – 400 V
Frequency	50 Hz
Nominal connection power	22 kW
Number of charging units	1
Max. power per charging point	22 kW
Width	368 mm
Height	356 mm
Depth	167 mm
Number of socket outlets Type 2	1
Number of earth leakage circuit breakers type A	1
Charging cable permanently lockable at charging device	True
DC residual current detection	True
Contactor welding detection	False
With circuit breaker	False
Network-enabled as a master	True
Network-enabled as an extender	True
Networkable via LAN	True
Networkable via Wi-Fi	True
With energy meter	True
With built-in RFID card reader	True
NFC (Near Field Communication)	True
Static load management integrated	True
Suitable for dynamic load management	True
Open Charge Point Protocol (OCPP) version	1.6
Plug and charge (ISO 15118)	True

Display	False
Material housing	Plastic
Degree of protection (IP rating)	IP54





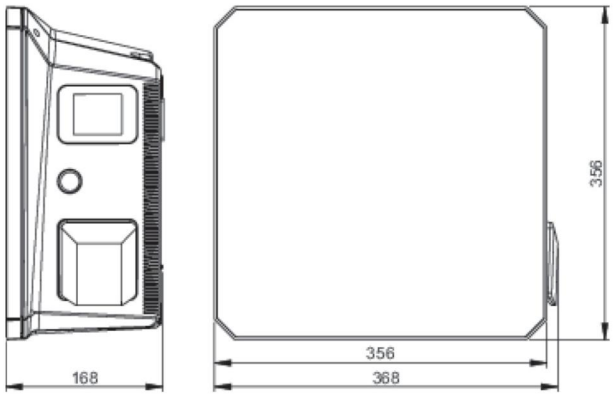

https://www.pcelectric.at/shop/en/?func=detail&artnr=3803003006-w

Changes and printing errors reserved!

7/30/2026