
article#	**76332-4**
article description	**CEE-switched interlocked socket DIN 63A 3p 4h IP66/IP67**
description long	CEE-switched interlocked socket DIN 63A 3p 4h IP66/IP67 housing material: PC/ABS rated current: 63A number of poles: 3 (2P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: screw terminals wall mounting, mechanical interlock, hinged window (6 modules), DIN-rail switch: ON/OFF PCE-Merz ML2-063; EN 60947-3; AC22A, 10kA cable entry: top, bottom or rear (incl. threaded blind cap) IP protection class: IP66/IP67
GTIN (EAN)	9003399320415
country of origin	AT
customs number	85366990
net weight	2.900 kg
packaging quantitiy	1
minimum order quantitiy	1



ETIM 9.0	EC001324
IEC-amperage	63 A
Number of poles	3
Voltage according to EN 60309-2	110 V (50+60 Hz) yellow
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP67
Switch	Mechanical locking
Empty locations on mounting rail	True
Material housing	Plastic
Model	Base unit and cover
Protection	None
Contact material	CuZn
Surface treatment contacts	Nickel-plated

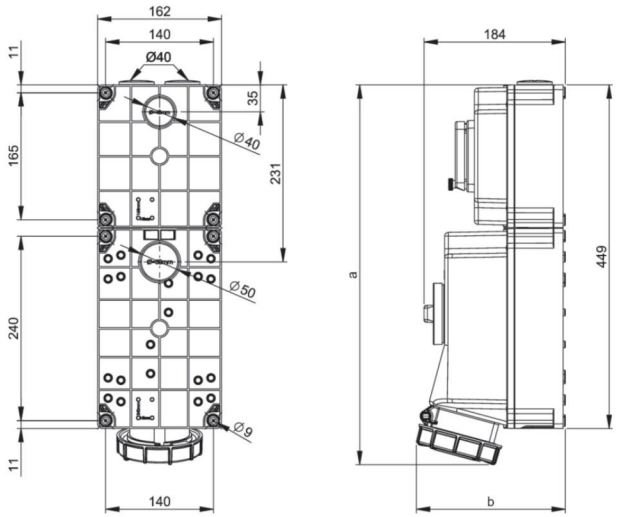

a	496 mm
b	195 mm
wire flexible	6-16 mm²
wire solid	6-25 mm²
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=76332-4

Changes and printing errors reserved!

2/26/2026