
article#	**090100028A**
article description	**Construction power distributor metal BV M-AVEV 63/321-6/FU2/A/Wien**
description long	Versorgungsgebiet: Wien Baustromverteiler 63A nach ÖVE EN 61439/4 RAL 2000 / 70kg / 710x1270x360mm (BxHxT) m. Untergest. 300mm incl. Überspannungsableiter 3+1 (TT+TN) Kl."C" (25A - 125A) Anschlusssicherung: NH-Trenner Gr.00 80A, mittels Schloss ET08-EHSK absperrbar Anschlussquerschnitt: max. 35mm² Cu Zählerplatz: Wirkstromzählerschleife H07V-K 16mm2 400V AC Haupsicherung: Lasttrennschalter mit Sicherung DIII 63A 1xCEE-Steckdose 63A 5p 400V keine Strompfadsicherung 2xCEE-Steckdose 32A 5p 400V abgesichert ü. 2xLS 32A 3p C 3xCEE-Steckdose 16A 5p 400V abgesichert ü. 3xLS 16A 3p C 6xSK-Steckdose 16A 250V IP54 abgesichert ü. 6xLS 16A 1p C 1xFI 63A/4/0,3A allstromsensitiver FI für CEE-Steckdose 63A 5p 400V 1xFI 63A/4/0,03A therm. fest für die restlichen Steckdosen
GTIN (EAN)	9003399558368
country of origin	DE
customs number	85371098
net weight	70.000 kg
minimum order quantitiy	1





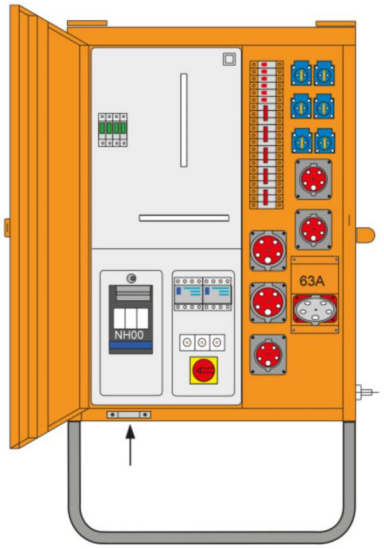

https://www.pcelectric.at/shop/en/?func=detail&artnr=090100028A

ETIM 9.0	EC000484
Model	Connection-/distributor cabinet
Rated voltage	230/400 V
Rated current	63 A
Connected load	44 kVA
Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 5P (1, 2, 3, N, PE)	3
Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 5P (1, 2, 3, N, PE)	2
Number of CEE socket outlets (IEC 60309) 63 A / 400 V / 5P (1, 2, 3, N, PE)	1
Number of socket outlets with protective contact CEE 7/3 (type F)	6
Number of meter panels	1
Main switch	Other
Main switch rated current	63 A
Number of poles main switch	3
Number of miniature circuit breakers	11
Leakage current type	Other
Number of earth leakage switches 30 mA	1
Number of earth leakage switches 300 mA	1
Degree of protection (IP)	IP44
Material housing	Steel
Width	710 mm
Height	1270 mm
Depth	360 mm

Changes and printing errors reserved!

8/1/2023