
article#	**7813-4**
article description	**CEE-switched interlocked socket DIN 16A 3p 4h IP44/IP54**
description long	CEE-switched interlocked socket DIN 16A 3p 4h IP44/IP54 housing material: PC/ABS rated current: 16A number of poles: 3 (2P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals wall mounting, mechanical interlock, incl. holder for Neozed fuses switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA cable entry: top, bottom or rear (incl. threaded blind cap) IP protection class: IP44/IP54
GTIN (EAN)	9003399345555
country of origin	AT
customs number	85366990
net weight	1.546 kg
packaging quantitiy	1
minimum order quantitiy	1





ETIM 9.0	EC001324
IEC-amperage	16 A
Number of poles	3
Voltage according to EN 60309-2	110 V (50+60 Hz) yellow
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP54
Switch	Mechanical locking
Empty locations on mounting rail	False
Material housing	Plastic
Model	Base unit and cover
Protection	D0-system
Contact material	CuZn
Surface treatment contacts	Nickel-plated

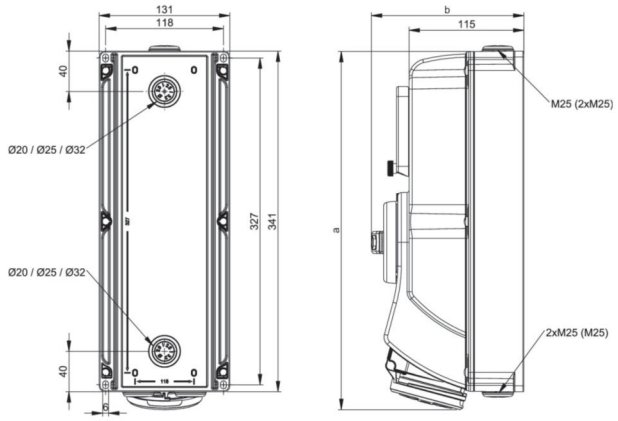

a	359 mm
b	153 mm
wire flexible	1,5-2,5 mm²
wire solid	1,5-4 mm²
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=7813-4

Changes and printing errors reserved!

2/26/2026