
| | |
|---|---|
| article# | **02492-9v** |
| article description | **CEE-plug 30A 3P4W 9h IP67 UL** |
| description long | CEE-plug 30A 3P4W 9h IP67 UL (PCE430P9Wv)<br>housing material: PA6<br>rated current: 32A/30A<br>number of poles: 3P4W (4p)<br>clock position: 9h<br>rated voltage: 250VAC<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP67<br>according to UL1682 und IEC/EN 60309-2 (SERIE II)<br>UL-product category: QLHN / QLHN7<br>UL-file number: E232901 |
| GTIN (EAN) | 9003399995446 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.242 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 10.0 | EC000140 |
| IEC-amperage | 32 A |
| Amperage according to UL/CSA (for UL-version) | 30 A |
| Number of poles | 4 |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Suitable for cable diameter | 13.3 – 19.3 mm |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

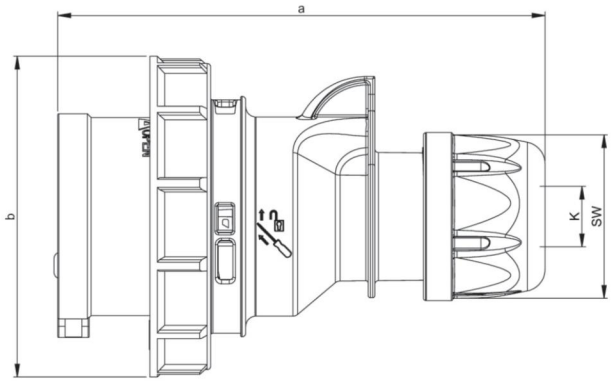


| | |
|---|---|
| a | 5.91 inch |
| b | 3.66 inch |
| K (cable Ø) | 0.52-0.76 inch |
| SW | 1.97 inch |
| wire flexible | 14-10 AWG |
| contact screws | 9.74 lbf-in |
| strain relief | 62.0 lbf-in |
| dismantling length | 1.97 inch |
| stripping length | 0.47-0.55 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=02492-9v

Changes and printing errors reserved!

3/18/2026