
| | |
|---|---|
| article# | **160815521** |
| article description | **Wall socket combination COMBO-POL2 CEE 16A 5p 2xSSD nat with switch 0/1 IP44** |
| description long | Wall socket combination COMBO-POL2 CEE 16A 5p 2xSSD nat with switch 0/1 IP44<br>housing material: PA6<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>cable entry: top (M25) or rear (Ø25)<br>with 2x safety socket 16A 250V (Austrian/German system)<br>with ON/OFF (0-I) switch AC22A<br>IP protection class: IP44 |
| GTIN (EAN) | 9003399653971 |
| country of origin | PL |
| customs number | 85366990 |
| net weight | 0.770 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |




| | |
|---|---|
| ETIM 9.0 | EC000379 |
| CEE socket outlet 16 A | 1x16A5p400V |
| Number of socket outlets with protective contact CEE 7/3 (type F) | 2 |
| Protection | None |
| Material housing | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |
| Power supply/connection possibility | 1 cable (branch line) |
| Number of poles mains connection | 5 |
| Diameter cable entry | M25 |
| Degree of protection (IP) | IP44 |
| Height | 237 mm |
| Width | 123 mm |
| Depth | 120 mm |

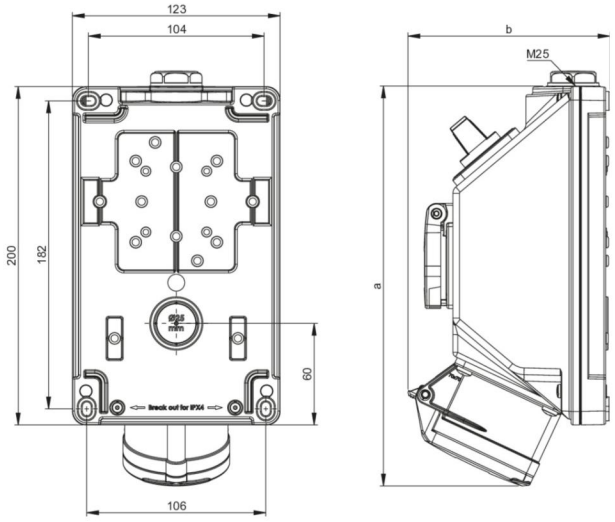


| | |
|---|---|
| a | 237 mm |
| b | 120 mm |
| wire flexible | 1-2,5 mm² |
| wire solid | 1,5-4 mm² |
| contact screws | 80 Ncm |
| housing screws | 160 Ncm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=160815521

Changes and printing errors reserved!

2/12/2026