
| | |
|---|---|
| article# | **24731-sr** |
| article description | **Safety connector cap fb LED IP54 red series TopTaurus2** |
| description long | Safety connector series TopTaurus2 with cap<br>color: black-red, material: PA6 2-component rubberized<br>screwless quick lock system for housing cover and strain relief<br>LED voltage indicator<br>earthing system: French/Belgian<br>16A/ 250V AC / 3p (2P+E), protection rating: IP54 |
| GTIN (EAN) | 9003399487149 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.128 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 10.0 | EC001327 |
| Model | Earthing pin |
| Material | Plastic |
| Material quality | Thermoplastic |
| Degree of protection (IP) | IP54 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| Suitable for protective contact pin | True |
| With voltage indication | True |
| With quick-lock | True |
| Colour | Red |
| Number of poles | 3 |
| Nominal voltage | 250 V |
| Nominal current | 16 A |
| For heavy conditions according to VDE | False |



| | |
|---|---|
| K (cable Ø) | 6-14 mm |
| SW | 21 mm |
| wire flexible | 1-2,5 mm² |
| contact screws | 80 Ncm |
| strain relief | 400 Ncm |
| dismantling length | 30 mm |
| stripping length | 7 mm |
| ambient temperature | -25 – 40 °C |

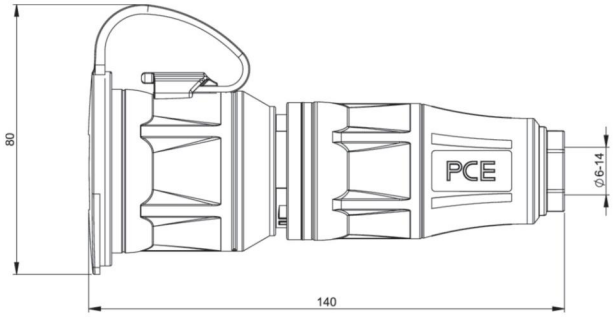


https://www.pcelectric.at/shop/en/?func=detail&artnr=24731-sr

Changes and printing errors reserved!

3/19/2026