
article#	**9527-6v**
article description	**CEE-wall mounted plug durchschleifbar 32A 7p 6h IP44/IP54**
description long	CEE-wall mounted plug durchschleifbar 32A 7p 6h IP44/IP54 housing material: PA6 rated current: 32A number of poles: 7 (6P+PE) clock-position: 6h rated voltage/frequency: 380-415V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44/IP54
GTIN (EAN)	9003399331633
country of origin	AT
customs number	85366990
net weight	0.202 kg
packaging quantitiy	5
minimum order quantitiy	10



ETIM 9.0	EC001319
IEC-amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	7
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP54
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

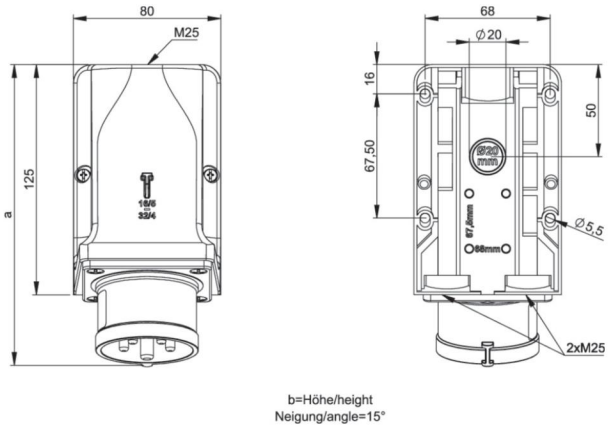

b=Höhe/height
Neigung/angle=15°

a	174 mm
b	118 mm
wire flexible	2,5-6 mm²
wire solid	2,5-10 mm²
contact screws	110 Ncm
housing screws	110 Ncm
connecting screws	110 Ncm
dismantling length	50 mm
stripping length	12-14 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=9527-6v

Changes and printing errors reserved!

8/1/2023