
| | |
|---|---|
| article# | **9755105** |
| article description | **CEE-switched interlocked socket 125A 5p 9h IP67** |
| description long | CEE-switched interlocked socket 125A 5p 9h IP67<br>housing material: PC/ABS<br>rated current: 125A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: screw terminals<br>wall mounting, mechanical interlock<br>switch: ON/OFF PCE-Merz ML3; EN 60947-3; AC22A (AC3, 690V, 3~, 45kW)<br>cable entry: top<br>IP protection class: IP67 |
| GTIN (EAN) | 9003399241833 |
| country of origin | AT |
| customs number | 85371098 |
| net weight | 5.000 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |




https://www.pcelectric.at/shop/en/?func=detail&artnr=9755105

| | |
|---|---|
| ETIM 9.0 | EC001324 |
| IEC-amperage | 125 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Switch | Mechanical locking |
| Material housing | Plastic |
| Model | Base unit and cover |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

| | |
|---|---|
| wire flexible | 16-50 mm² |
| wire solid | 16-70 mm² |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

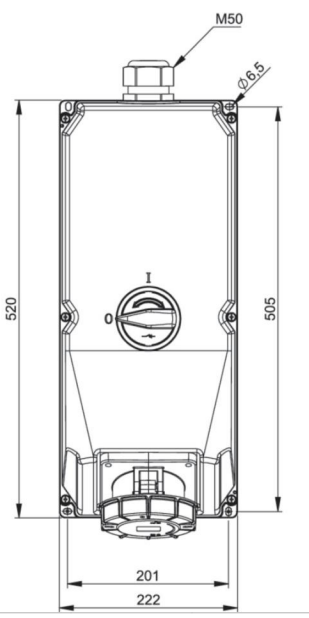

Changes and printing errors reserved!