
| | |
|---|---|
| article# | **635-6.u** |
| article description | **CEE-flanged plug straight 63A 5p 6h IP67 POWER TWIST bronze-green** |
| description long | CEE-flanged plug straight 63A 5p 6h IP67<br>POWER TWIST bronze-green<br>housing material: PA6<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x100 mm / 80x80 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399291791 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.570 kg |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 63 A |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles | 5 |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Built-up device plug |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

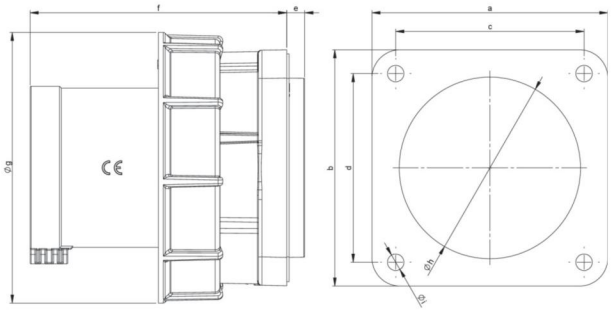

| | |
|---|---|
| a | 100 mm |
| b | 100 mm |
| c | 80 mm |
| d | 80 mm |
| e | 8 mm |
| f | 109 mm |
| g | 115 mm |
| h | 77 mm |
| i | 7 mm |
| wire flexible | 6-16 mm² |
| wire solid | 6-25 mm² |
| contact screws | 200 Ncm |
| connecting screws | 200 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=635-6.u

Changes and printing errors reserved!

8/1/2023