
article#	**6359-9**
article description	**CEE-inlet flange 100x100 straight 60A 4P5W 9h IP69k UL**
description long	CEE-inlet flange 100x100 straight 60A 4P5W 9h IP69k UL (PCE560B9W) housing material: PA6 rated current: 60A number of poles: 4P5W (5p) clock position: 9h rated voltage: 120/208VAC contacts: brass nickel plated connection technology: frame terminals with screws IP rating: IP6X, X6, X7, X9k (watertight) UL type: 4, 4X HP-rating (locked rotor): 7.5 according to UL1682 and IEC/EN 60309-2 (SERIES II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399690778
country of origin	AT
customs number	85366990
net weight	0.550 kg
packaging quantitiy	2
minimum order quantitiy	2



ETIM 9.0	EC001319
Amperage according to UL/CSA (for UL-version)	60 A
Voltage according to EN 60309-2	Other
Number of poles	5
Clock hour position	9 h
Identification colour	Blue
Degree of protection (IP)	IP69K
Connection system	Screwed terminal
Construction type	Built-up device plug
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

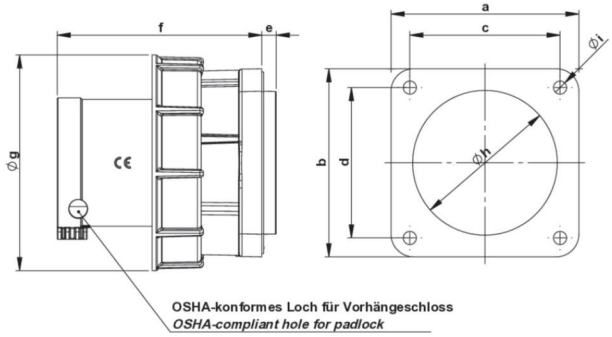

a	3.94 inch
b	3.94 inch
c	3.15 inch
d	3.15 inch
e	0.31 inch
f	4.29 inch
g	4.53 inch
h	3.03 inch
i	0.28 inch
wire flexible	10-4 AWG
contact screws	17.7 lbf-in
connecting screws	17.7 lbf-in
stripping length	0.59-0.71 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=6359-9

Changes and printing errors reserved!

1/20/2026