
| | |
|---|---|
| article# | **3435-6xs** |
| article description | **CEE-flanged socket straight (120x120) 125A 3p 6h IP67 Pilot POWER TWIST black** |
| description long | CEE-flanged socket straight (120x120) 125A 3p 6h IP67 Pilot POWER TWIST black<br>housing material: PA6<br>rated current: 125A<br>number of poles: 3 (2P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 120x120 mm / 100x100 mm<br>with pilot contact sleeve<br>IP protection class: IP66/IP67 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |



| | |
|---|---|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 125 A |
| Voltage according to EN 60309-2 | 230 V (50+60 Hz) blue |
| Number of poles | 3 |
| Clock hour position | 6 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Flange size vertical | 120 mm |
| Drill hole distance vertical | 100 mm |
| Flange size horizontal | 120 mm |
| Drill hole distance horizontal | 100 mm |

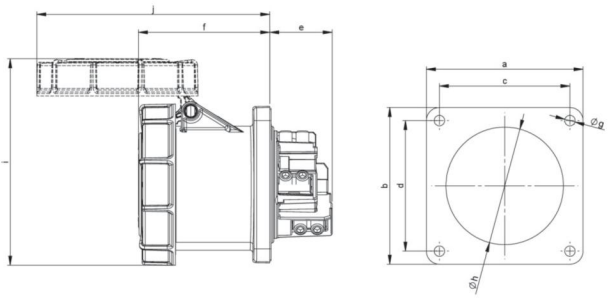


| | |
|---|---|
| a | 120 mm |
| b | 120 mm |
| c | 100 mm |
| d | 100 mm |
| e | 48 mm |
| f | 101 mm |
| g | 8 mm |
| h | 90 mm |
| i | 159 mm |
| j | 179 mm |
| wire flexible | 16-50 / 1-2,5 (Pilotkontakt) mm² |
| wire solid | 16-70 / 1-4 (Pilotkontakt) mm² |
| contact screws | 450 / 100 (Pilotkontakt) Ncm |
| dismantling length | 100 mm |
| stripping length | 24-27 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=3435-6xs

Changes and printing errors reserved!

8/2/2023