
| | |
|---|---|
| article# | **41392-4f8** |
| article description | **CEE-receptacle flange 80x97 angled 20A 2P3W 4h IP67 UL** |
| description long | CEE-receptacle flange 80x97 angled 20A 2P3W 4h IP67 UL (PCE320RA4W)<br>housing material: PA6<br>rated current: 16A/20A<br>number of poles: 2P3W (3p)<br>clock position: 4h<br>rated voltage: 120VAC<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 80x97mm / 60x73mm<br>IP protection class: IP67<br>according to UL1682 und IEC/EN 60309-2 (SERIE II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| GTIN (EAN) | 9003399438936 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.131 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 16 A |
| Amperage according to UL/CSA (for UL-version) | 20 A |
| Number of poles | 4 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Flange size vertical | 97 mm |
| Drill hole distance vertical | 73 mm |
| Flange size horizontal | 80 mm |
| Drill hole distance horizontal | 60 mm |

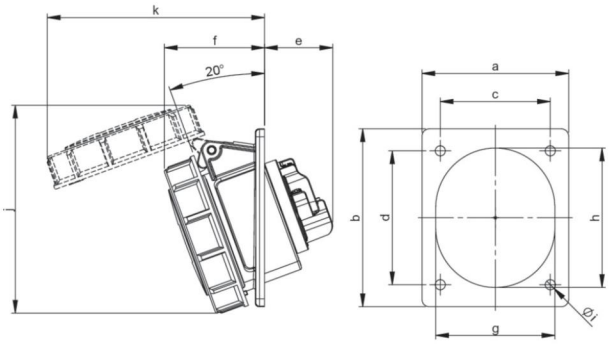


| | |
|---|---|
| a | 3.15 inch |
| b | 3.82 inch |
| c | 2.36 inch |
| d | 2.87 inch |
| e | 1.50 inch |
| f | 1.97 inch |
| g | 2.01 inch |
| h | 2.40 inch |
| i | 0.22 inch |
| j | 4.02 inch |
| k | 4.06 inch |
| wire flexible | 16-12 AWG |
| wire solid | 1-4 mm² |
| contact screws | 8.85 lbf-in |
| dismantling length | 1.97 inch |
| stripping length | 0.39-0.47 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=41392-4f8

Changes and printing errors reserved!

8/18/2025