
article#	**3359-9**
article description	**CEE-receptacle flange 100x100 60A 4P5W 9h IP69k UL**
description long	CEE-receptacle flange 100x100 60A 4P5W 9h IP69k UL (PCE560R9W) housing material: PA6 rated current: 60A number of poles: 4P5W (5p) clock position: 9h rated voltage: 120/208VAC contacts: brass with lamellar spring CuBe connection technology: frame terminals with screws IP rating: IP6X, X6, X7, X9k (watertight) UL type: 4, 4X HP-rating (locked rotor): 7.5 according to UL1682 and IEC/EN 60309-2 (SERIES II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399690761
country of origin	AT
customs number	85366990
net weight	0.587 kg
packaging quantitiy	2
minimum order quantitiy	2



ETIM 9.0	EC001317
IEC-amperage	60 A
Voltage according to EN 60309-2	Other
Number of poles	5
Clock hour position	9 h
Identification colour	Blue
Degree of protection (IP)	IP69K
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	100 mm
Drill hole distance vertical	80 mm
Flange size horizontal	100 mm
Drill hole distance horizontal	80 mm

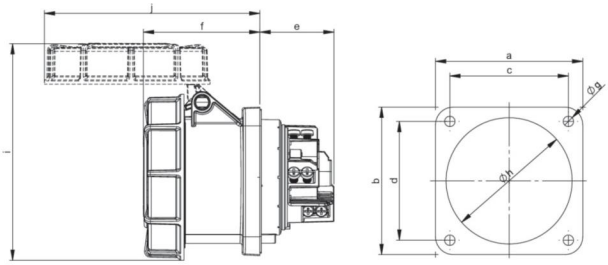

a	3.94 inch
b	3.94 inch
c	3.15 inch
d	3.15 inch
e	1.97 inch
f	3.15 inch
g	0.28 inch
h	3.35 inch
i	5.79 inch
j	5.75 inch
wire flexible	10-4 AWG
contact screws	17.7 lbf-in
stripping length	0.59-0.71 inch
temperature resistance	-13 – 176 °F

https://www.pcelectric.at/shop/en/?func=detail&artnr=3359-9

Changes and printing errors reserved!

(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at