
| | |
|---|---|
| article# | **8024-2v** |
| article description | **CEE angled plug 32A 4p 2h IP44 TWIST** |
| description long | CEE angled plug 32A 4p 2h IP44 TWIST<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 2h<br>rated voltage/frequency: >50V~ / 300-500Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 10.0 | EC000140 |
| IEC-amperage | 32 A |
| Number of poles | 4 |
| Voltage according to EN 60309-2 | 50-500 V (>300-500 Hz) green |
| Clock hour position | 2 h |
| Identification colour | Green |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Suitable for cable diameter | 11.5 – 20 mm |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

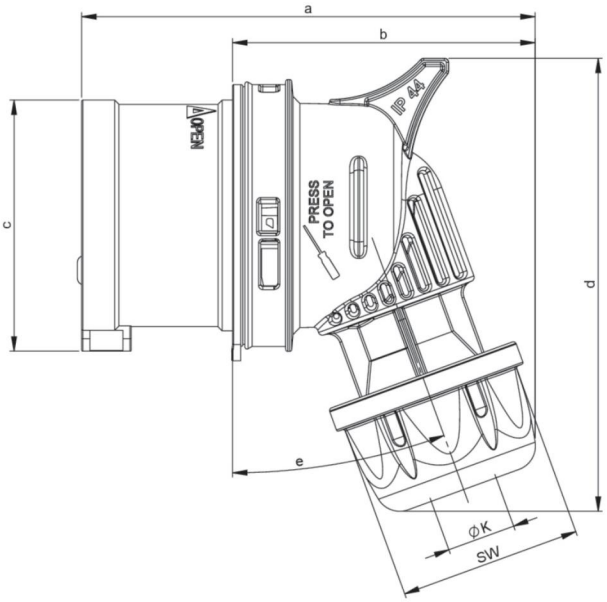


| | |
|---|---|
| a | 125 mm |
| b | 80 mm |
| c | 63 mm |
| d | 110 mm |
| e | 25 ° |
| K (cable Ø) | 11,5-20 mm |
| SW | 50 mm |
| wire flexible | 2,5-6 mm² |
| contact screws | 110 Ncm |
| strain relief | 600 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=8024-2v

Changes and printing errors reserved!

3/18/2026