

| | |
|---|---|
| article# | **24212-sc** |
| article description | **2-way connector fb with shutter and lid IP44 black** |
| description long | 2-way safety connector with hinged lid<br>housing material: PC/ABS, contact carrier: PA<br>color housing: black<br>3-pole terminal block<br>earthing system: French/Belgian with shutter<br>contacts: nickel plated<br>250V~ / 16A / 2P+E / 3500W max<br>protection rating: IP44 |
| GTIN (EAN) | 9003399554575 |
| country of origin | PL |
| customs number | 85366990 |
| net weight | 0.221 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 100 |

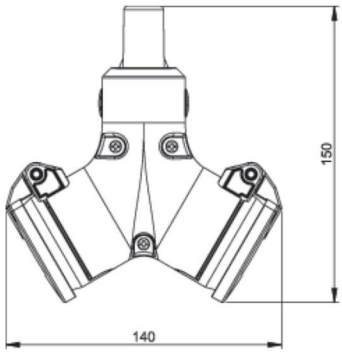




| | |
|---|---|
| ETIM 10.0 | EC001327 |
| Model | Earthing pin |
| Material | Plastic |
| Material quality | Thermoplastic |
| Degree of protection (IP) | IP44 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| Suitable for protective contact pin | True |
| Colour | Black |
| Number of poles | 3 |
| Nominal voltage | 250 V |
| Nominal current | 16 A |
| For heavy conditions according to VDE | True |

https://www.pcelectric.at/shop/en/?func=detail&artnr=24212-sc

| | |
|---|---|
| wire flexible | 1-2,5 mm² |
| contact screws | 80 Ncm |
| strain relief | 80 Ncm |
| dismantling length | 30 mm |
| stripping length | 7 mm |



Changes and printing errors reserved!

8/13/2026