

| | |
|---|---|
| article# | **105-0esw** |
| article description | **Socket outlet with protective contact 50x50 nat bulge IP54 side (yellow)** |
| description long | Socket outlet with protective earth contact series S-NOVA<br>housing material: PA6, color: yellow<br>flange size: 50x50 mm<br>connection technology: screw terminal, side entry system: Austrian/German earthing system with sealing bulge<br>contacts: nickel plated<br>250V / 16A / 2P+E , protection rating: IP54 |
| GTIN (EAN) | 9003399509186 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.048 kg |
| packaging quantitiy | 100 |
| minimum order quantitiy | 200 |



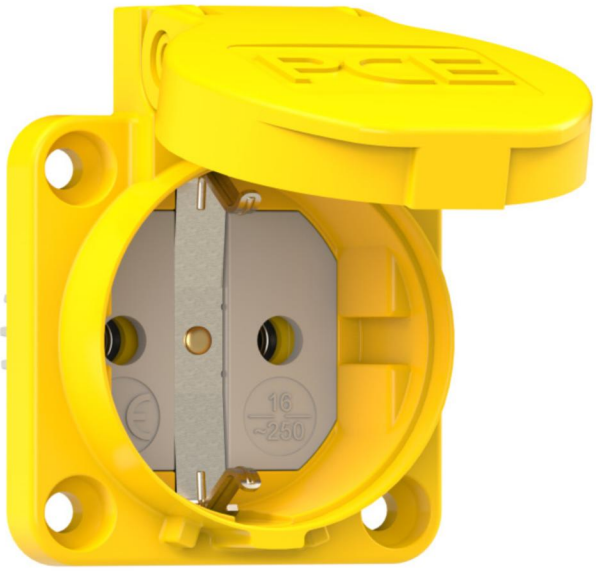

| | |
|---|---|
| ETIM 9.0 | EC001325 |
| Model | Socket outlet CEE 7/3 (type F) |
| Material | Plastic |
| Material quality | Thermoplastic |
| Halogen free | True |
| Flange size | 50x50 mm |
| With hinged lid | True |
| For heavy conditions according to VDE | True |
| Degree of protection (IP) | IP54 |
| Insert direction | Straight |
| Connection system | Screwed terminal |
| Colour | Yellow |
| RAL-number | 1023 |
| Number of poles | 3 |
| Nominal current | 16 A |
| Nominal voltage | 250 V |

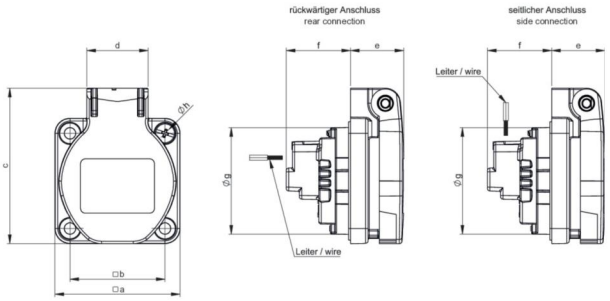


| | |
|---|---|
| a | 50 mm |
| b | 38 mm |
| c | 62 mm |
| d | 25 mm |
| e | 21 mm |
| f | 26 mm |
| g | 43 mm |
| h | 4,5 mm |
| wire flexible | 1,5-2x2,5 mm² |
| wire solid | 1,5-2x2,5 mm² |
| contact screws | 80 Ncm |
| stripping length | 8-10 mm |
| ambient temperature | -25 – 40 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=105-0esw

Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at