

article#	**635-2**
article description	**CEE-flanged plug straight 63A 5p 2h IP67 POWER TWIST**
description long	CEE-flanged plug straight 63A 5p 2h IP67 POWER TWIST housing material: PA6 rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 2h rated voltage/frequency: >50V~ / 300-500Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws dimensions (flange/fixing center): 100x100 mm / 80x80 mm IP protection class: IP66/IP67
GTIN (EAN)	9003399084881
country of origin	AT
customs number	85366990
net weight	0.570 kg
packaging quantitiy	2
minimum order quantitiy	2

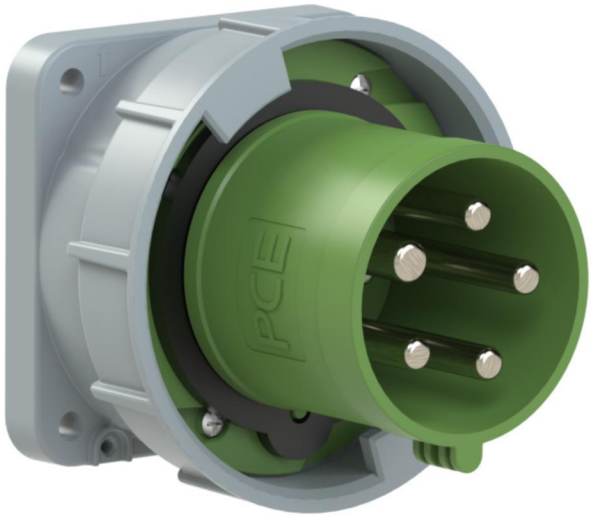

ETIM 9.0	EC001319
IEC-amperage	63 A
Voltage according to EN 60309-2	50-500 V (>300-500 Hz) green
Number of poles	5
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Construction type	Built-up device plug
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

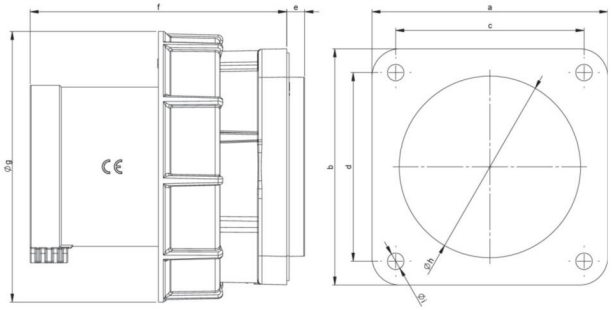

a	100 mm
b	100 mm
c	80 mm
d	80 mm
e	8 mm
f	109 mm
g	115 mm
h	77 mm
i	7 mm
wire flexible	6-16 mm²
wire solid	6-25 mm²
contact screws	200 Ncm
connecting screws	200 Ncm
dismantling length	100 mm
stripping length	15-18 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=635-2

Changes and printing errors reserved!

8/1/2023