
article#	**3813000-w**
article description	**PCE PRI:CHARGER 22kW DOT2 LAN MID ws**
description long	PCE PRI:CHARGER Charging Station for Electric Vehicles Connection: (230)400V AC, 50Hz, (1)3-phase Number of charging units: 1 Socket outlet Type 2 with locking actuator Max. power per charging point: 22kW Nominal connection power: 22kW WxHxD: 368x356x167 mm Mounting method: Wall mounting Protection: RCCB A + DC-fault protection (6mA) Access control: RFID Controller: ICC1324 Communication interface: LAN Module, WiFi Communication: OCPP 1.6 JSON, Modbus TCP ISO 15118 Powerline Communication (PLC) for plug & charge/ autocharge integrated modbus energy meter, certified acc. to MID directive Material housing: plastic/ black Front Design: PCE standard, white Degree of protection: IP54 Ambient temperature: -20°C bis +40°C Standards: IEC 61851-1, IEC 61851-22, IEC 62196
GTIN (EAN)	9003399642067
country of origin	AT
customs number	85371098
net weight	7.500 kg
packaging quantitiy	1
minimum order quantitiy	1

ETIM 9.0	EC002883
Installation side connection model	3-phase
Input voltage	230 – 400 V
Frequency	50 Hz
Nominal connection power	22 kW
Number of charging units	1
Max. power per charging point	22 kW
Width	368 mm
Height	356 mm
Depth	167 mm
Mounting method	Wall mounting
Number of socket outlets Type 2	1
Number of earth leakage circuit breakers type A	1
Charging cable permanently lockable at charging device	True
DC residual current detection	True
Contactor welding detection	False
With circuit breaker	False
Network-enabled as a master	True
Network-enabled as an extender	True
Networkable via LAN	True
Networkable via Wi-Fi	True
LTE	False
With energy meter	True
With built-in RFID card reader	True
NFC (Near Field Communication)	True
Static load management integrated	True
Suitable for dynamic load management	True

Open Charge Point Protocol (OCPP) version	1.6





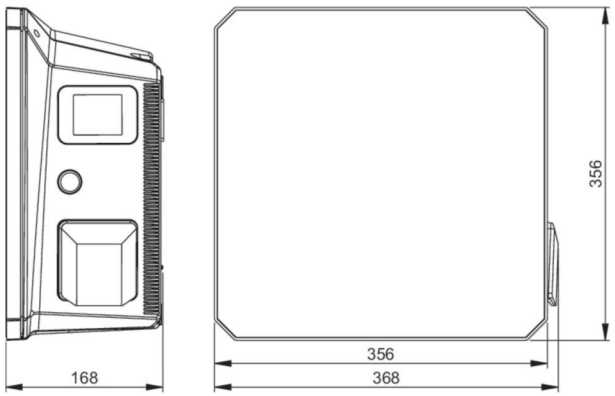

https://www.pcelectric.at/shop/en/?func=detail&artnr=3813000-w

Changes and printing errors reserved!

4/7/2025