
| | |
|---|---|
| article# | **51392-4kv** |
| article description | **CEE-inlet wall mount 20A 2P3W 4h IP67 UL** |
| description long | CEE-inlet wall mount 20A 2P3W 4h IP67 UL (PCE320BS4Wv)<br>housing material: PA6<br>rated current: 16A/20A<br>number of poles: 2P3W (3p)<br>clock position: 4h<br>rated voltage: 120VAC<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP67<br>according to UL1682 und IEC/EN 60309-2 (SERIE II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| GTIN (EAN) | 9003399454912 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.200 kg |
| packaging quantitiy | 5 |
| minimum order quantitiy | 5 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 16 A |
| Amperage according to UL/CSA (for UL-version) | 20 A |
| Number of poles | 3 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Surface mounted device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

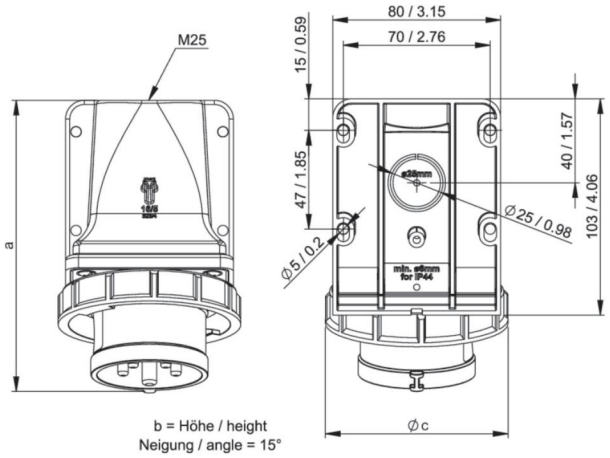


| | |
|---|---|
| a | 5.35 inch |
| b | 3.90 inch |
| c | 2.80 inch |
| wire flexible | 16-12 AWG |
| wire solid | 1-4 mm² |
| contact screws | 8.85 lbf-in |
| connecting screws | 9.74 lbf-in |
| dismantling length | 1.97 inch |
| stripping length | 0.39-0.47 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=51392-4kv

Changes and printing errors reserved!

2/23/2026