
article#	**243711-shucw5**
article description	**3-way connector Taurus2 rubber cap with band fb SH 5p IP54 green**
description long	3-way connector Taurus2 rubber with cap color housing/terminal-cover: black/green contact carrier: polyamide ready wired on 5-pole terminal block (PH1) earthing system: French/Belgian with shutter (type E - with earth pin) contacts: nickel plated 250V~ / 16A / 2P+E internal strain relief with cable clamp and bend protection sleeve for serve conditions protection rating: IP54
country of origin	AT
customs number	85366990
packaging quantitiy	5
minimum order quantitiy	50





ETIM 10.0	EC001327
Model	Earthing pin
Material	Rubber
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Suitable for protective contact pin	True
Colour	Green
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

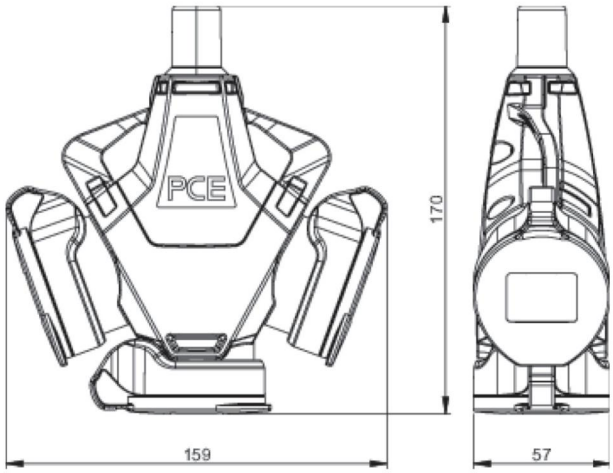

K (cable Ø)	6-13 mm
wire flexible	1-2,5 mm²
contact screws	50 Ncm
housing screws	160 Ncm
strain relief	80 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK10

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

https://www.pcelectric.at/shop/en/?func=detail&artnr=243711-shucw5

Changes and printing errors reserved!

(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at